

Technical Specification

TT-premium[®] S2-6400 Twin HD

Twin tuner DVB-S/-S2 Receiver for PCIe slot



TechnoTrend


Performance on your side.

Based on TT-premium[®] family

BASICS

- Pay- and Free- TV satellite receiver
- PCI Express card for use with Personal Computer
- Video and Audio decoding via hardware decoder (MPEG-2 and MPEG-4 AVC/H.264)
- Installation Plug und Play
- Features reception and presentation of DVB[®] data services (high-speed multicast and internet access)
- Fully compliant to: DVB-S standard EN 302 307
- MPEG2 Transport Stream support: ISO/IEC 13818-1
- DVB-Video/-Audio support: ISO/IEC 13818-2,-3
- DVB-Data support: EN 301 192

FRONT PANEL

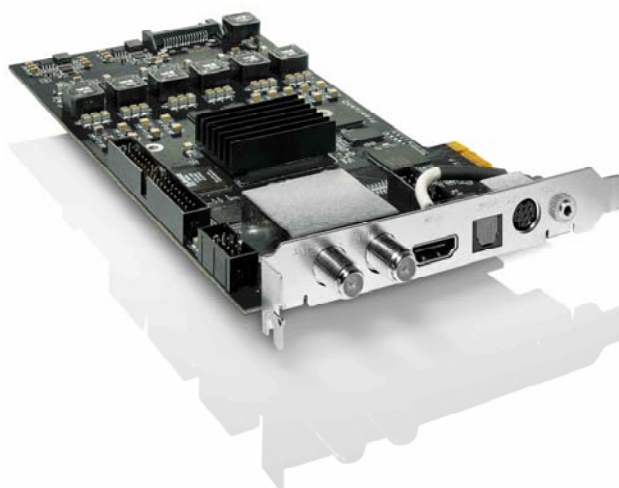

LNB CONTROL

- Band selection: 22 KHz
- Polarity selection: 14/18 V
- Tone burst mode
- DiSEqC 1.0
- LNB current support maximal 400 mA

REMOTE CONTROL



GENERAL DATA

- Cabinet: approx. 130 x 20 x 220 mm
- Weight : approx. 0,3 kg

TT-CONTROL-CENTER SOFTWARE


- Recording and Play back of TV/Radio programs
- Teletext decoding
- Time shift support
- Timer / sleep Timer
- Favourite mode
- EPG (SI based)
- Short EPG (now/next)
- languages : D, GB
- Automatic/manual channel search

HARDWARE VIDEO DECODER

- MPEG profiles : MPEG-2 Video, MPEG-4 AVC/H.264
- High Definition and Standard Definition: 1080i25, 720p50, 576i25
- Picture Formates : Auto WSS 4:3, 16:9, 2.21:1 (Pal only)

HARDWARE AUDIO DECODER

- Profiles : MPEG 2 layer I & II
- AC 3 Decoding : yes



CityCom GmbH, Am Kroit 25/27, 83123 Amerang, Deutschland

Telefon: +49 (0) 8075 9141-0, Fax: +49 (0) 8075 9141-90, www.tt-pc.com

All rights reserved. Subject to changes in technology, design and availability. The product names mentioned in this document are trademarks or registered trademarks of their respective owners.

Version June 2010

Technical Specification

TT-premium[®] S2-6400 Twin HD

Twin tuner DVB-S/-S2 Receiver for PCIe slot



TechnoTrend

Performance on your side.

INPUT / OUTPUT SPECIFICATION

- 2x Antenna input: IEC female F-type (75Ω)
- 2.5mm phone jack to connect the infrared receiver for remote control
- HDMI 1.1 connector
- Optical S/PDIF output
- Mini DIN connector for Audio/Video

RF SPECIFICATION

- Frequency range: 950-2150 MHz
- QPSK demodulation according to EN 302 307
- RF input level: -65 up to -25 dBm

For DVB-S

- SCPC/MCPC support 2 Msymbols/s to 45 Msymbols/s
- QPSK with supported rates 1/2, 2/3, 3/4, 5/6, 6/7, 7/8
- Viterbi soft decoder rate 1/2
- Outer Reed-Solomon decoder (EN 300 421)
- Up to 60 Mbps Channel bit rate

For DVB-S2

- SCPC/MCPC support 10 Msymbols/s to 30 Msymbols/s
- QPSK and 8PSK with supported rates 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
- LDPC and BCH decoder as per DVB-S2 requirements
- Digital Nyquist root filter with 0.20, 0.25, 0.35 roll-off factors
- Up to 90 Mbps channel bit rate

MINIMUM SYSTEM REQUIREMENTS

- Windows XP, Windows Vista, Windows7, Windows 8 32- and 64bit
- CPU: at least P4 2 GHz or a equal processor
- PCIe 1x slot
- 512MB RAM (1024MB recommended)
- Hard disk with at least 1GB free storage space
- Graphics card with at least 64 MByte memory and DirectX 9.0c support or higher
- Sound card with DirectX 9.0c support or higher
- CD ROM drive
- Suitable digital satellite dish

SCOPE OF DELIVERY

- PCIe receiver
- Infrared receiver
- Remote Control with batteries
- Video Breakout Cable for analog audio/video
- HDMI Cabel
- Quick-Start Guide
- CD-Rom including driver and application software

EAN CODE:

- 42 6006463 365 1

LOGOS



CityCom GmbH, Am Kroit 25/27, 83123 Amerang, Deutschland

Telefon: +49 (0) 8075 9141-0, Fax: +49 (0) 8075 9141-90, www.tt-pc.com

All rights reserved. Subject to changes in technology, design and availability. The product names mentioned in this document are trademarks or registered trademarks of their respective owners.

Version June 2010